

EPECON



bathroom and design radiators



VARIANT - FORMGE DIN RADIATOR MED EGET MOTIV ELLER LOGOTYP

Det finns färdiga geometriska former, motiv med blommor, logotyper eller färger att välja på..... eller varför inte var kreativ själv.



VARIANT




Material	steel pipes Ø 28 mm / steel profiles 70 × 11 mm
Connection thread	2 × G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	95 °C




Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	75/65/20°C	Heating Output 70/55/20°C	55/45/20°C	Connection span [mm]	
1806/608	40	42,5–44,5	8,2	1,279	1070	869	557	mc 50	variant plan
1806 / 608	40	42,5–44,5	8,2	1,279	1070	869	557	mc 50	variant with perforations
1806 / 608	40	37,9–39,1	8,2	1,279	749	608	390	mc 50	variant stainless steel plan
1806 / 608	40	37,9–39,1	8,2	1,279	749	608	390	mc 50	variant stainless steel with perforation


Thermal power measuring follows in accordance with EN 442.
Stainless steel rail is available.

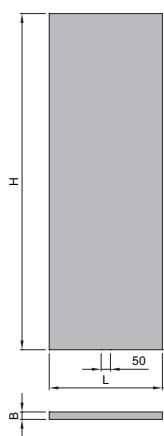


DVAR 1806 0608...

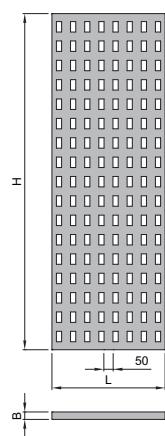

DVAR 1806 0608...



~109
76
B
L
50
 ≥ 100



Rail - position option
109
50
1300

VARIANT

